


### EPIC STONE COLLECTION








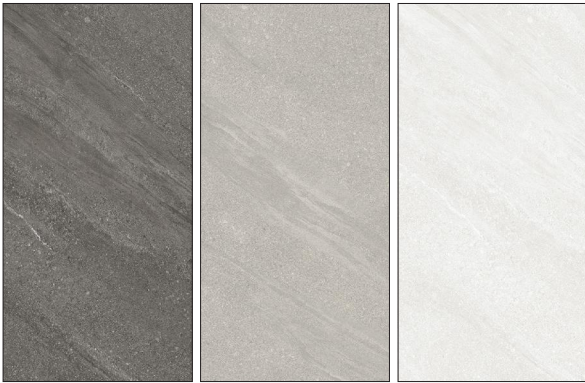






#### COMMERCIAL DESCRIPTION OF THE PRODUCT

COMPANY	BELLISSIMO
PRODUCT	EPIC STONE
ARTICLE	EPIC WHITE - EPIC GREY - EPIC ANTHRACITE
SIZES	60 X 60 CM
	60 X 120 CM
PRODUCT GROUP	Bla (Water absorption $\leq 0,5 \%$ );
GRAPHIC FACES	6 ( for 60X120 cm), 12 ( for 60X60 cm) ;
GRAPHIC IMAGE	
SURFACE	MATT
EDGES	RECTIFIED
THICKNESS	8.25mm - 9.5mm



ISO 9001:2015

### TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTICS		TEST METHOD	ISO STANDARD	BELLISSIMO STANDARD	
	DIMENSION	WIDTH AND LENGTH	ISO 10545 - 2	± 0.6%	± 0.1%
		THICKNESS	ISO 10545 - 2	± 5%	± 4%
		STRAIGHTNESS OF SIDES	ISO 10545 - 2	± 0.5%	± 0.1%
		RECTANGULARITY	ISO 10545 - 2	± 0.5%	± 0.1%
		SURFACE FLATNESS	ISO 10545 - 2	± 0.5%	± 0.15%
	SURFACE QUALITY		ISO 10545 - 2	MIN 95%	99.5%
	WATER ABSORPTION		ISO 10545 - 3	< 0.5%	< 0.5% FOR GL
	BREAKING STRENGTH (S)		ISO 10545 - 4	≥ 1300 N	≥ 2000 N
	MODULUS OF RUPTURE		ISO 10545 - 4	≥ 35 N/mm <sup>2</sup>	≥ 45 N/mm <sup>2</sup>
	MOISTURE EXPANSION		ISO-10545-10	NIL	NIL
	FROST RESISTANCE		ISO-10545-12	RESISTANCE	RESISTANCE
	CHEMICAL RESISTANCE		ISO-10545-13	RESISTANCE	RESISTANCE
	HARDNESS OF SURFACE		ISO-10545-13	≥ 4 moh's	≥ 5 moh's
	STAIN RESISTANCE		ISO-10545-14	RESISTANCE	CLASS 5*

\* \* \* Vary according to surface finish like matt, satin, polish, & lappata.

\* \* \* Excluding hydrofluoric acid and its derivatives.

\* \* \* The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.