
















MARBLE STONE MATT COLLECTION

COMMERCIAL DESCRIPTION OF THE PRODUCT

COMPANY	BELLISSIMO
PRODUCT	MARBLE STONE - MATT
ARTICLE	BEIGE - WHITE - GREY - LIGHT GREY
SIZES	60 X 60 CM
	60 X 120 CM
PRODUCT GROUP	Bla (Water absorption $\leq 0,5 \%$);
GRAPHIC FACES	6 (for 60X120 cm), 12 (for 60X60 cm), for white 5 & 10 ;
GRAPHIC IMAGE	
SURFACE	MATT
EDGES	RECTIFIED
THICKNESS	9.1mm - 11mm

TECHNICAL SPECIFICATION


TECHNICAL CHARACTERISTICS		TEST METHOD	ISO STANDARD	BELLISSIMO STANDARD	
	DIMENSION	WIDTH AND LENGTH	ISO 10545 - 2	± 0.6%	± 0.1%
		THICKNESS	ISO 10545 - 2	± 5%	± 4%
		STRAIGHTNESS OF SIDES	ISO 10545 - 2	± 0.5%	± 0.1%
		RECTANGULARITY	ISO 10545 - 2	± 0.5%	± 0.1%
		SURFACE FLATNESS	ISO 10545 - 2	± 0.5%	± 0.15%
	SURFACE QUALITY	ISO 10545 - 2	MIN 95%	99.5%	
	WATER ABSORPTION	ISO 10545 - 3	< 0.5%	< 0.5% FOR GL	
	BREAKING STRENGTH (S)	ISO 10545 - 4	≥ 1300 N	≥ 2000 N	
	MODULUS OF RUPTURE	ISO 10545 - 4	≥ 35 N/mm ²	≥ 45 N/mm ²	
	MOISTURE EXPANSION	ISO-10545-10	NIL	NIL	
	FROST RESISTANCE	ISO-10545-12	RESISTANCE	RESISTANCE	
	CHEMICAL RESISTANCE	ISO-10545-13	RESISTANCE	RESISTANCE	
	HARDNESS OF SURFACE	ISO-10545-13	≥ 4 moh's	≥ 5 moh's	
	STAIN RESISTANCE	ISO-10545-14	RESISTANCE	CLASS 5*	

* * * Vary according to surface finish like matt, satin, polish, & lapata.








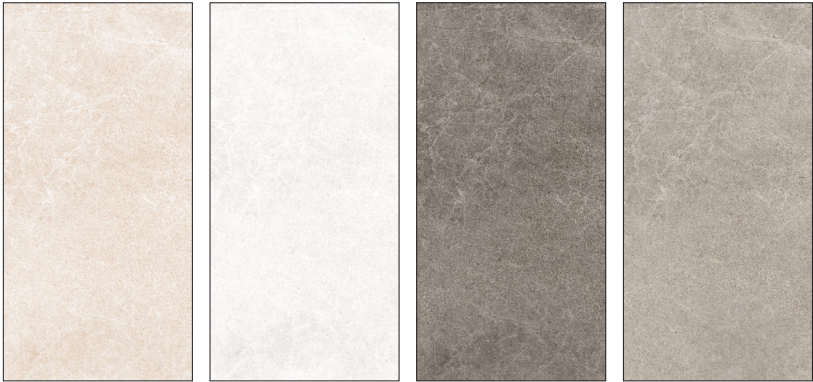






* * * Excluding hydrofluoric acid and its derivatives.

* * * The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.

MARBLE STONE LUX COLLECTION

COMMERCIAL DESCRIPTION OF THE PRODUCT	
COMPANY	BELLISSIMO
PRODUCT	MARBLE STONE - LUX
ARTICLE	BEIGE - WHITE - GREY - LIGHT GREY
SIZES	60 X 60 CM
	60 X 120 CM
PRODUCT GROUP	Bla (Water absorption $\leq 0,5 \%$);
GRAPHIC FACES	6 (for 60X120 cm), 12 (for 60X60 cm), for white 5 & 10 ;
GRAPHIC IMAGE	
SURFACE	POLISHED
EDGES	RECTIFIED
THICKNESS	9.1mm - 11mm

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTICS		TEST METHOD	ISO STANDARD	BELLISSIMO STANDARD	
	DIMENSION	WIDTH AND LENGTH	ISO 10545 - 2	± 0.6%	± 0.1%
		THICKNESS	ISO 10545 - 2	± 5%	± 4%
		STRAIGHTNESS OF SIDES	ISO 10545 - 2	± 0.5%	± 0.1%
		RECTANGULARITY	ISO 10545 - 2	± 0.5%	± 0.1%
		SURFACE FLATNESS	ISO 10545 - 2	± 0.5%	± 0.15%
	SURFACE QUALITY		ISO 10545 - 2	MIN 95%	99.5%
	WATER ABSORPTION		ISO 10545 - 3	< 0.5%	< 0.5% FOR GL
	BREAKING STRENGTH (S)		ISO 10545 - 4	≥ 1300 N	≥ 2000 N
	MODULUS OF RUPTURE		ISO 10545 - 4	≥ 35 N/mm ²	≥ 45 N/mm ²
	MOISTURE EXPANSION		ISO-10545-10	NIL	NIL
	FROST RESISTANCE		ISO-10545-12	RESISTANCE	RESISTANCE
	CHEMICAL RESISTANCE		ISO-10545-13	RESISTANCE	RESISTANCE
	HARDNESS OF SURFACE		ISO-10545-13	≥ 4 moh's	≥ 5 moh's
	STAIN RESISTANCE		ISO-10545-14	RESISTANCE	CLASS 3*

* * * Vary according to surface finish like matt, satin, polish, & lapata.

* * * Excluding hydrofluoric acid and its derivatives.

* * * The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.