












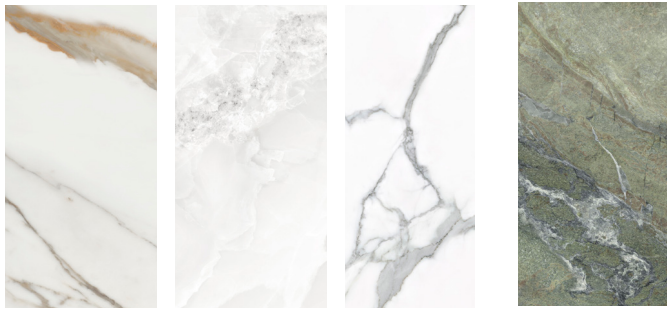



## MILLENIUM LUX COLLECTION

### COMMERCIAL DESCRIPTION OF THE PRODUCT

COMPANY	BELLISSIMO
PRODUCT	MILLENIUM LUX
ARTICLE	CALACATTA GOLD - VERDE SUPERIOR - ONICE ICE STATUARIO EXTRA
SIZES	60 X 120 CM, 60 X 60 CM ;
PRODUCT GROUP	Bla (Water absorption $\leq$ 0,5 %) ;
GRAPHIC FACES	05 ( for 60X120 cm), 10 ( for 60X60 cm) ;
GRAPHIC IMAGE	
SURFACE	POLISHED - HIGHGLOSS*
EDGES	RECTIFIED
THICKNESS	8.25 mm - 9.5 mm



TECHNICAL CHARACTERISTICS		TEST METHOD	ISO STANDARD	BELLISSIMO STANDARD	
	DIMENSION	WIDTH AND LENGTH	ISO 10545 - 2	± 0.6%	± 0.1%
		THICKNESS	ISO 10545 - 2	± 5%	± 4%
		STRAIGHTNESS OF SIDES	ISO 10545 - 2	± 0.5%	± 0.1%
		RECTANGULARITY	ISO 10545 - 2	± 0.5%	± 0.1%
		SURFACE FLATNESS	ISO 10545 - 2	± 0.5%	± 0.15%
	SURFACE QUALITY		ISO 10545 - 2	MIN 95%	COMPLIANT
	WATER ABSORPTION		ISO 10545 - 3	< 0.5%	< 0.5% FOR GL
	BREAKING STRENGTH (S)		ISO 10545 - 4	≥ 1300 N	≥ 2000 N
	MODULUS OF RUPTURE		ISO 10545 - 4	≥ 35 N/mm <sup>2</sup>	≥ 45 N/mm <sup>2</sup>
	MOISTURE EXPANSION		ISO-10545-10	NIL	NIL
	FROST RESISTANCE		ISO-10545-12	RESISTANT	RESISTANT
	CHEMICAL RESISTANCE		ISO-10545-13	RESISTANT	HA-LA, HB-LB
	HARDNESS OF SURFACE		ISO-10545-13	≥ 4 moh's	≥ 5 moh's
	STAIN RESISTANCE		ISO-10545-14	RESISTANT	CLASS 5*

” \* “ Vary according to surface finish like matt, satin, polish, & lappato.

“ \* “ Excluding hydrofluoric acid and its derivatives.

“ \* “ The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards.