


KR STONE

ELEMENT | Brand driven
by design

KR STONE

3 COLORS

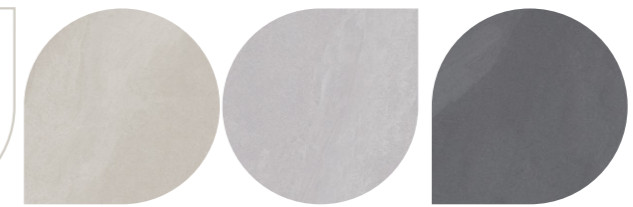

600x1200mm. 24"x48"

600x600mm. 24"x24"

ELEMENT | Brand driven
by design

SILVER



Wall: EC612801N 600x1200mm 24"x48"

Floor: EC66801N 600x600mm 24"x24"



● Floor: EC66802N 600x600mm 24"x24"

APRICOT



Wall: EC66801N 600x600mm 24"x24"

Floor: EC66802N 600x600mm 24"x24"



GREY





● Wall: EC612804N 600x1200mm 24"x48"

● Wall: EC66804N 600x600mm 24"x24"


APRICOT

PRODUCT INFORMATION

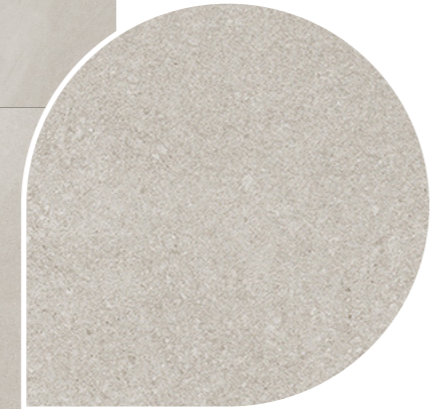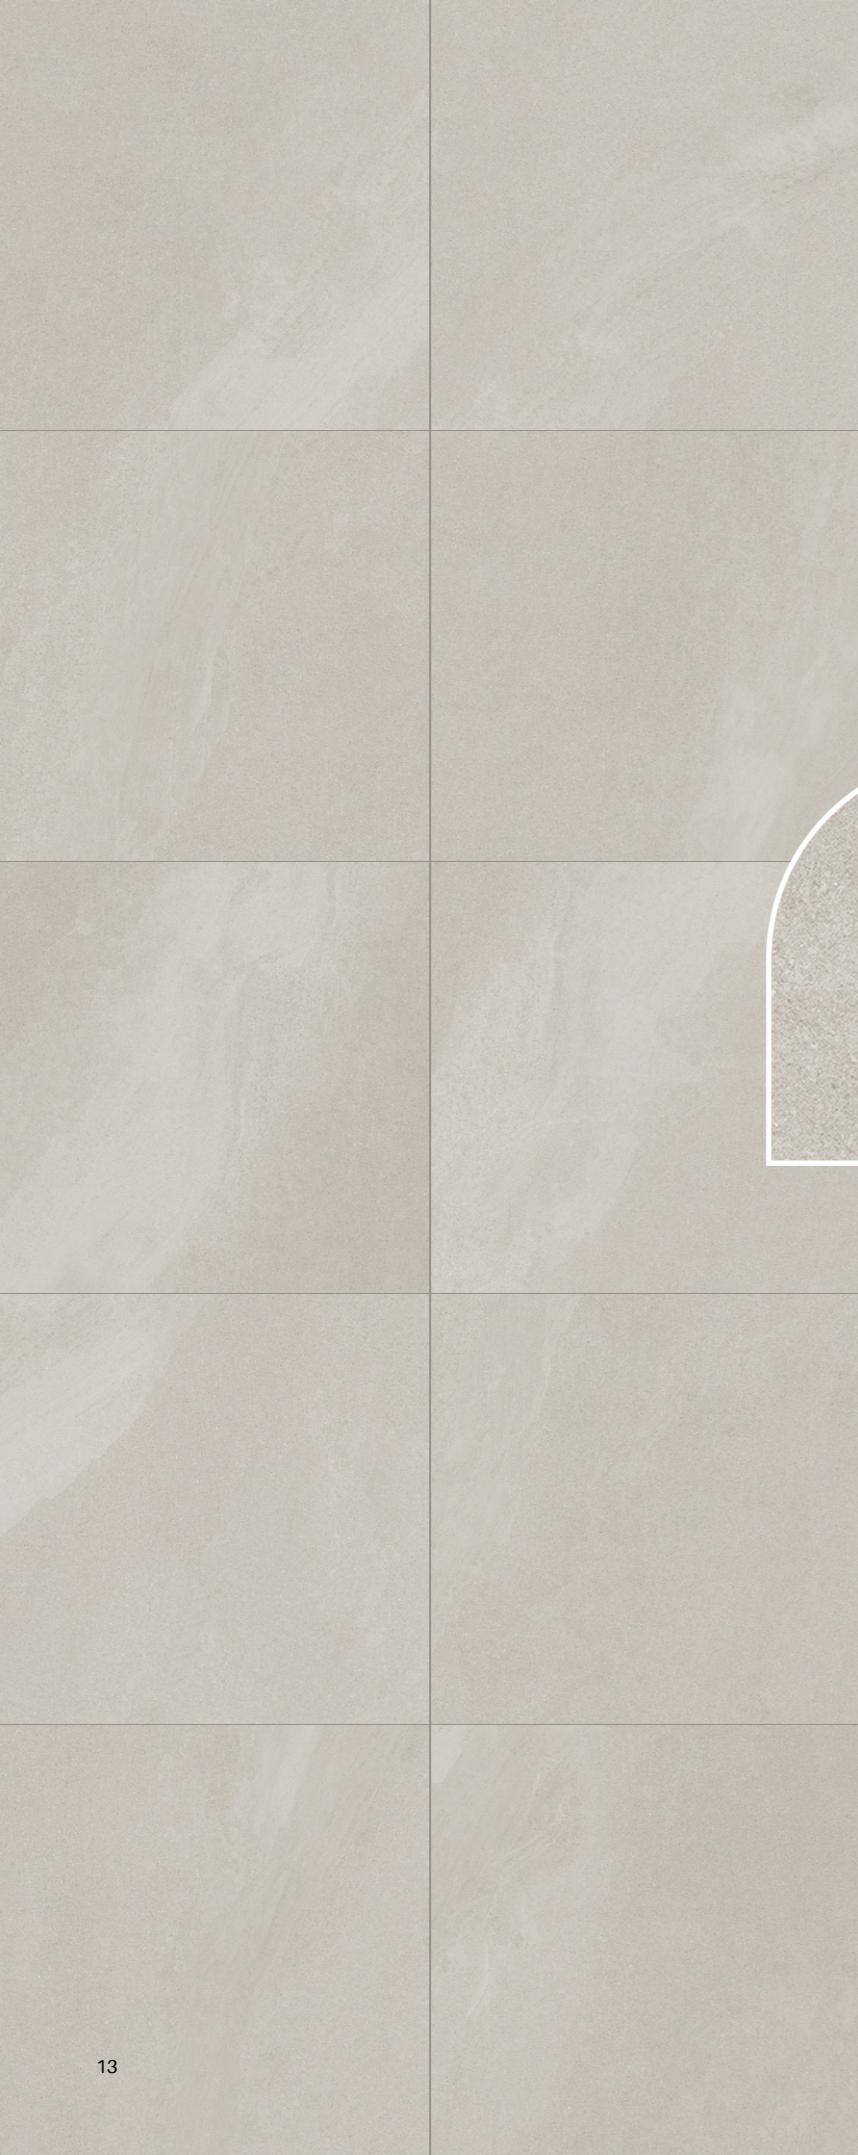


SIZE

600x1200mm
24"x48"



600x600mm
24"x24"



SURFACE:

NATURAL

MODEL:

EC612802N

EC66802N


10MM
THICKNESS



* Colors and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.


SILVER

PRODUCT INFORMATION

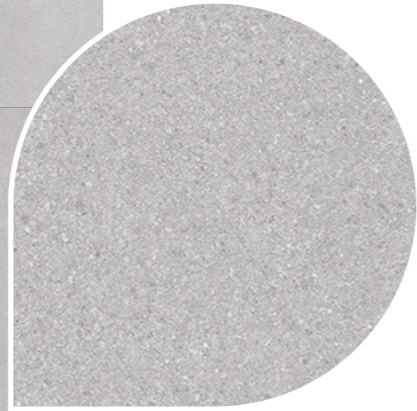

SIZE

600x1200mm
24"x48"

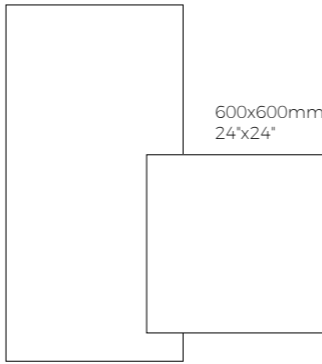

SURFACE:


NATURAL

MODEL:

EC612801N

EC66801N


10MM
THICKNESS

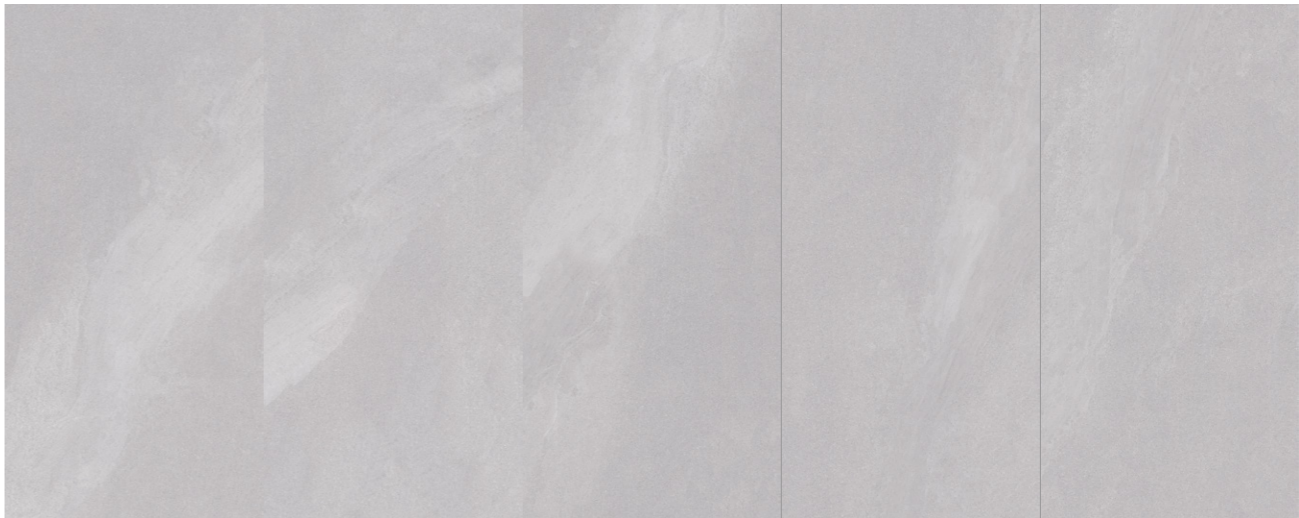

* Colors and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.


GREY

PRODUCT INFORMATION

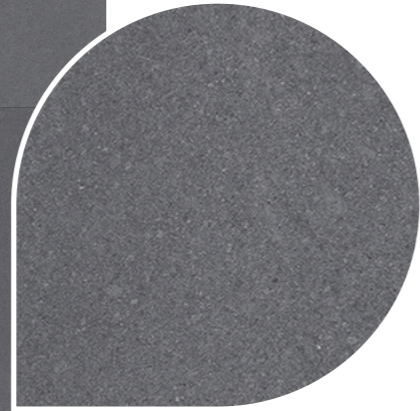

SIZE

600x1200mm
24"x48"

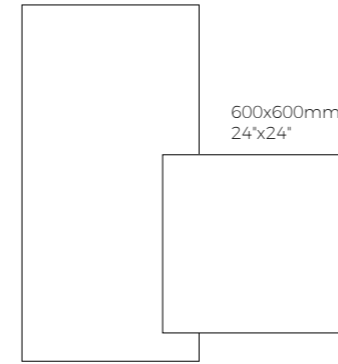

SURFACE:


NATURAL

MODEL:

EC612804N

EC66804N

10MM
THICKNESS

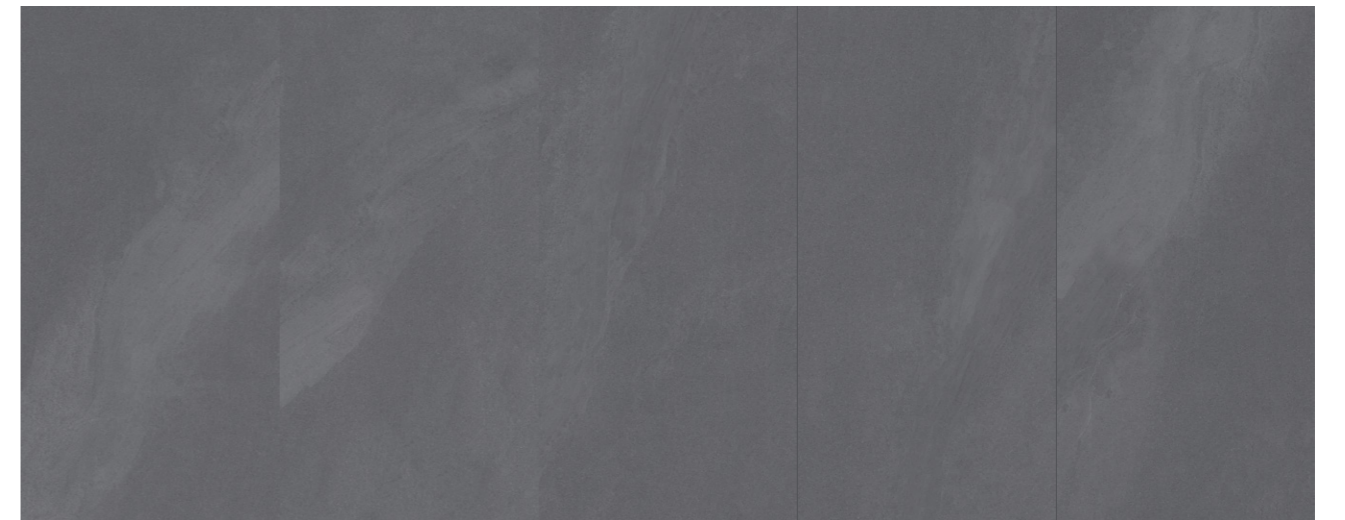

* Colors and tile designs shown above are for illustration purposes. Please refer to actual tiles for final selection.

CLEANING PRODUCTS

TYPES OF DETERGENTS Where sales are permitted	A SOLVENTIS (bleaching solution, oil of turpentine, acetone, trichloroethylene, nitrate based thinner)
	B ACIDS (muriatic acid, hydrochloric acid, phosphoric acid)
	C ALKALINE BASED DETERGENTS - ALKALI (alkaline-based professional detergents)

TYPES OF STAIN	A		B		C	
	MATT	POLISHED	MATT	POLISHED	MATT	POLISHED
BEER				■	■	
COFFEE		■				
LIME			■	■		
TAR	■	■				
CEMENT			■	■		
CANDLE WAX	■	■				
KOKA KONA		■				
GLUE	■	■				
CHEWING GUM	■	■			■	
TYRE RUBBET, SHOES	■	■				
GREASE, OIL					■	■
INK	■	■				
NICOTINE	■	■				
FELT-TIP PEN	■	■				
RESINS	■	■				
RUST			■	■		
NAIL POLISH	■	■				
CIGARETTE			■	■		
WALL PAINT	■	■	■	■		
WINE		■				



Cleaning And Maintenance

Special Cleaning Or Deep Cleaning

Clean the floor with a rough cloth soaked in lukewarm water and basic detergent for organic dirt (grease, oil, foods) and caid detergent for inorganic dirt, cement and imescale. At the end of this process, rinse the floor with clean lukewarm water.

Detergents

You may use any detergent available on the market, at the prescribed concentration, with the exception of hydrofluoric (HF) acid or its compound. However, it is always advisable to test the resistance of the material on a small area first, in order to avoid alterations to the floor surface.



Grouting And Final Cleaning

Grouting And Final Cleaning

When using normal drying adhesive, grout the floor after 24-48 hours, when using rapid drying adhesives, grout after 4 hours.

When working with polished materials in particular, use cement grouts of a matching tone, avoiding dark color grouts with oale materials, and vice versa.

When grouting these surfaces, it is advisable not to use flexible mortars made from synthetic materials (Flexfughe), especially if the color contrasts that of the material, and not to use additives/latex. In fact, these products make it extremely difficult to remove any residue using normal cleaning products. If using grouts with contrasting or special pigments, take care to follow the information provided in the specifications and test the grout on the material before hand.

Use a rubber-coated spatula to apply the grout over the entire surface of the material.

Grout small areas at a time, removing excess grout with damp sponges or clothes (using clean water only) or specific equipment for removing excess grout, while the layer of grout is still damp.

Adequate initial cleaning is fundamental to get the best shining and to ensure cleanability and easy everyday maintenance. Initial cleaning should therefore be performed immediately after laying, using acid-based products, scrubbing and rinsing with plenty of water. This will make it possible to remove any grout, adhesive and cement residue, etc. You may use any detergent available on the market, with the sole exception of products containing hydrofluoric acid (compounds and derivatives) as provided for by standard EN 14411.

We recommend protecting the laid flooring carefully. When carrying out other operations such as painting, plumbing or other work, we recommend covering the floor with PVC sheets, airballs or fabrics once it has been laid.

APPLICATIONS

SURFACE	APPLICATIONS					
	Indoor commercial settings with heavy foot traffic	Indoor commercial settings with light foot traffic	Residential settings	Indoor wall coverings	Outdoor floor settings	Countertops
POLISHED	■	■	■	■	-	-
MATT	■	■	■	■	■	■

*Per informazioni e consigli Vi invitiamo a contattare il rivenditore.

E L E M E N T | Brand driven
by design

ADD :

Floor 15, Building D1, West Area, Lvdao Plaza,
No.129, Jihua Xi Road, Chancheng, Foshan, Guangdong.

ADD :

Element Ceramics, Block E, West District, China Ceramics
Headquarters, Jihua West Road, Chancheng, Foshan, Guangdong.

TEL : +86-757-82271888

FAX : +86-757-82270033

E-MAIL : element@element-ceramics.com

WEBSITE : www.element-ceramics.com



OFFICIAL
ACCOUNTS



WEBSITE